

# 12W/25W G2 SECURITY WALL PACK



**JAYKAL**

PROJECT NAME:

**JAYKAL LED SOLUTIONS, INC.**

[www.jaykal.net](http://www.jaykal.net)

PROJECT NOTES:

21499 Baltimore Ave.

Georgetown, DE 19947

(P) 302-295-0015

(F) 302-295-0016

## FEATURES

- ◆ Available in 12 Watt or 25 Watt Versions
- ◆ CCT Options: 3000K/4000K/5000K/5700K
- ◆ Replaces up to 75W HID, 80W Incandescent or 36W CFL
- ◆ 5 Year Standard Warranty, 10 Year Optional
- ◆ Finish Options: Black, Custom Available
- ◆ Optional Photocell



Revised 9/6/23

*Specifications are typical values and may change without notification*

**efficiency. illuminated.**


# 12W/25W G2 SECURITY WALL PACK



**JAYKAL**

## SPECIFICATIONS

MODEL	JLS-G2SWP-12	JLS-G2SWP-25
WATTAGE	12W	25W
INPUT VOLTAGE	120-277VAC 50/60Hz	
EFFICACY	140LM/W	
LUMENS	1,680	3,500
BUG RATING	B1-U3-G1	B1-U3-G2
POWER FACTOR	>0.95	
DRIVER EFFICIENCY	≥85%	
DRIVER CLASS	Class II	
THD	<20%	
CRI	>70	
SURGE PROTECTION	2KV Standard	
L70 HOURS	>50,000 Hours	
CCT	(3000K/4000K/5000K)	
OPERATIONAL TEMP.	(-30°C to 45°C)	
HOUSING MATERIAL	Die-Cast Aluminum	
IP RATING	IP65	
LENS	Prismatic Polycarbonate	
0-10V CURRENT	<1mV	
ILLUMINATION ANGLE	70°	
CERTIFICATIONS	ETL	
HOUSING FINISH	Black / Custom	
WARRANTY	5 Years (10 Years Available)	
FCC	FCC Title 47 CFR Part 18 Compliance	

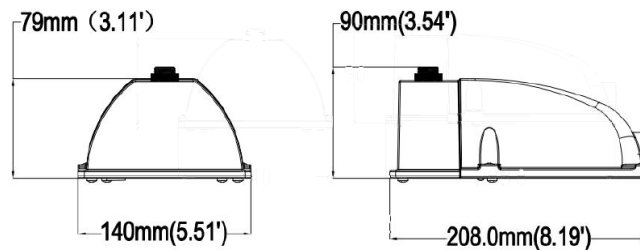

## ORDERING GUIDE

JLS-G2SWP-12-B-D-750K-P

MODEL	WATTAGE	FINISH	DIMMING	CCT	OPTIONS
JLS-G2SWP	12 = 12W 25 = 25W	B = Black	D = 0-10V	730K = 3000K 740K = 4000K 750K = 5000K 757K = 5700K	Blank = No option P = Photocell

*Specifications are typical values and may change without notification*

**efficiency. illuminated.**