



G3 Forward Throw Wall Pack

JAYKAL

PROJECT NAME:

JAYKAL LED SOLUTIONS, INC.

www.jaykal.net

PROJECT NOTES:

21499 Baltimore Ave.

Georgetown, DE 19947

(P) 302-295-0015 (F) 302-295-0016

FEATURES

- ◆ Adjustable Wattage (4 settings)
- ◆ Adjustable CCT (3 settings)
- ◆ 0-10V Dimming
- ◆ Compatible with 0-10V Lighting Controls.
- ◆ IK08 Die-Cast Aluminum Housing with Tempered Glass Cover.
- ◆ Detachable Mounting Plate Fits Most Standard Junction Boxes or Can be Surface Mounted and Wired via Conduit Entries.



RoHS 
Compliant

(P) 302-295-0015 | (E) sales@jaykal.net | (W) www.jaykal.net

Revised 11/13/23

Specifications are typical values and may change without notification

efficiency. illuminated.



G3 Forward Throw Wall Pack

JAYKAL

SPECIFICATIONS				
MODEL	JLS68103-G3FT-M1	JLS68103-G3FT-M2	JLS68103-G3FT-M3	JLS-G3FT-M4
WATTAGE	10W/20W/30W/40W	20W/40W/60W/80W	25W/50W/75W/100W	30W/60W/90W/120W
INPUT VOLTAGE	100-277VAC 50/60Hz			
EFFICACY	125 lm/W			
LUMENS	1,250/2,500/3,750/5,000	2,500/5,000/7,500/10,000	3,125/6,250/9,375/12,500	3,750/7,500/11,250/15,000
BUG RATING	B1-U3-G3	B3-U4-G4	B3-U4-G5	B3-U5-G5
POWER FACTOR	0.90			
DRIVER EFFICENCY	≥87%			
DRIVER CLASS	Class II			
THD	<20%			
SURGE PROTECTION	4KV Standard			
DIMMING TYPE	0-10V			
0-10V CURRENT SUPPLY	<1mA			
CRI	>70			
L70 HOURS	161,000 Hours			
CCT	MCCT(3000K/4000K/5000K Adjustable)			
OPERATIONAL TEMP.	30°C - 40°C (-22°F - 104°F)			
HOUSING MATERIAL	Die-Cast Aluminum			
IP RATING	IP65			
IK RATING	IK08			
HOUSING FINISH	Dark Bronze / Custom			
PROTECTION	Wet Location IP65			
WEIGHT	5.73 ~ 7.95lbs			
DIMENSIONS	10.27"W x 6.44D" x 9.36H"		12.05W" x 6.42D" x 9.32H"	
WARRANTY	5 Years Standard, 10 Year Optional			
CERTIFICATIONS	ETL/DLC			
FCC	FCC Title 47 CFR Part 18 Compliance			

MODEL	DIP SWITCH 100%	DIP SWITCH 75%	DIP SWITCH 50%	DIP SWITCH 25%
JLS68103-G3FT-40	40W	30W	20W	10W
JLS68103-G3FT-80	80W	60W	40W	20W
JLS68103-G3FT-100	100W	75W	50W	25W
JLS68103-G3FT-120	120W	90W	60W	30W

ORDERING GUIDE		EXAMPLE: JLS68103-G3FT-80-277-MCCT-B-CM								
MODEL	-	WATTAGE	-	VOLTAGE	-	CCT	-	FINISH	-	Control
JLS-G3FT		M1 = 10W/20W/30W/40W M2 = 20W/40W/60W/80W M3 = 25W/50W/75W/100W M4 = 30W/60W/90W/120W		277 = 120-277VAC		MCCT = (3000K,4000K,5000K)		B = Black C = Custom D = Dark Bronze		CP = Photocell CM = Motion Sensor CS = Power & CCT Adjustable CE = Emergency back up

(P) 302-295-0015 | (E) sales@jaykal.net | (W) www.jaykal.net

Specifications are typical values and may change without notification


efficiency. illuminated.

G3 Forward Throw Wall Pack




JAYKAL

Field Installable Cap for Photocell

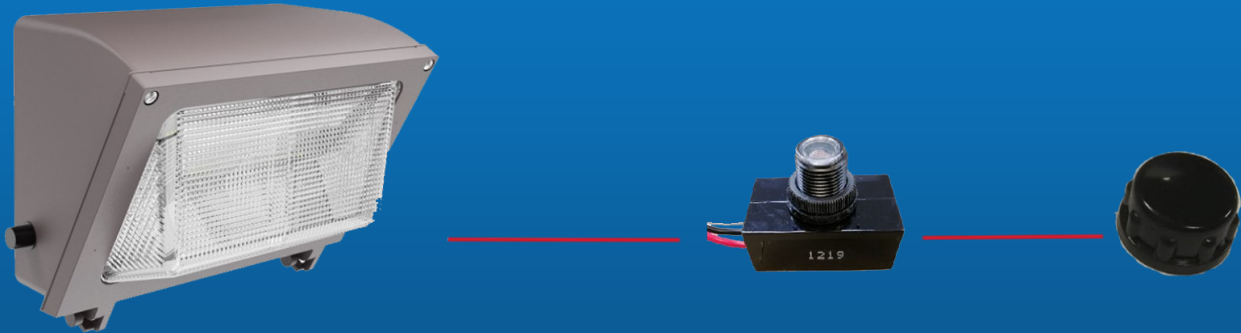


The photocell is covered by a cap, when you need photocell function, just remove the cap.


Field Installable Photocell & Motion Sensor

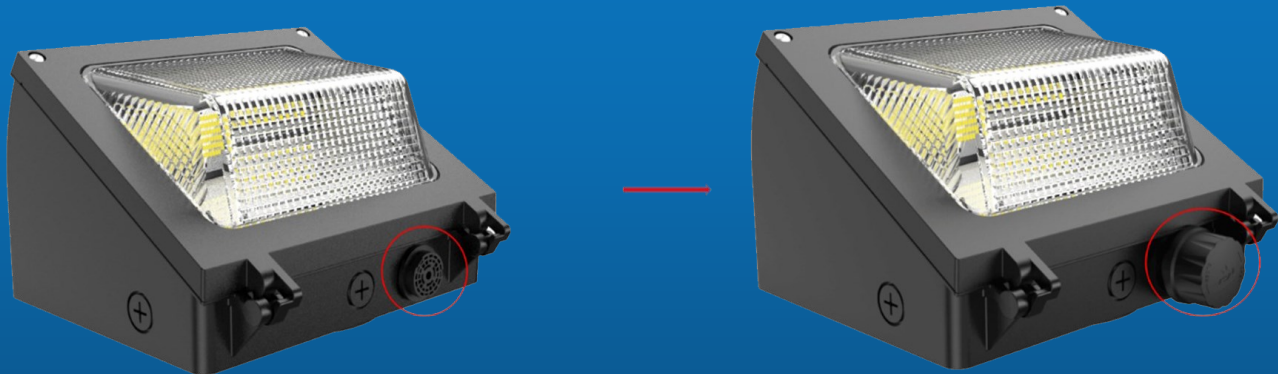

No need to drill a hole, no need for rewiring, lowers inventory cost.

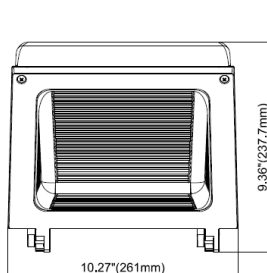

M1/M2 Types

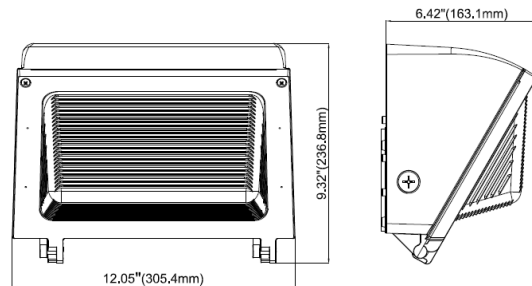

M3/M4 Types

(P) 302-295-0015 | (E) sales@jaykal.net | (W) www.jaykal.net

Specifications are typical values and may change without notification

efficiency. illuminated.



Power Adjustable (Adjustable Wattage by Slide Switch)



The default settings are 25%, 50%, 75%, 100%. This can be adjusted to the project requirements.

CCT Selectable (Adjust wattage by DIP Switch)



One fixture , multiple color temperatures, 3000K & 4000K & 5000K all in one.