



G2 WRAP FIXTURES

JAYKAL

PROJECT NAME:	JAYKAL LED SOLUTIONS, INC. www.jaykalusa.com 21499 Baltimore Ave. Georgetown, DE 19947 (P) 302-295-0015 (F) 302-295-0016
PROJECT NOTES:	

FEATURES

- ◆ Wattage Options: Vari-Watt Driver Standard
- ◆ CCT Options: 3000K, 3500K, 4000K, 5000K, MCCT
- ◆ Lumen Package: 130lm/W
- ◆ 0-10V Dimming Standard
- ◆ Optional Bi-Level Dimming
- ◆ Optional: OC/OCBL Motion Sensor
- ◆ Optional Emergency Backup
- ◆ 5 Year Warranty, 10 Year Available



Revised 5/8/23

Specifications are typical values and may change without notification

efficiency. illuminated.

G2 WRAP FIXTURES



JAYKAL

SPECIFICATIONS TABLE			
DRIVER	M1	M2	M3
INPUT VOLTAGE	100-277VAC 50/60Hz		
WATTAGE	15W/20W/25W	20W/30W/40W	30W/40W/50W
EFFICACY	130lm/W		
LUMENS	1,950lm to 3,250lm	2,600lm to 5,200lm	3,900lm to 6,500lm
L70 HOURS	100,000 Hrs. +		
POWER FACTOR	>0.9	>0.9	>0.9
THD	<20%		
CRI	>80		
CCT	3000K/3500K/4000K/5000K/MCCT		
OPERATIONAL TEMP	-30°C - 50°C		
HOUSING MATERIAL	Steel		

PRODUCT	LENGTH (IN.)	WIDTH (IN.)	DEPTH (IN.)
JLS68102-G2WRAP-2FT	27.20	5.78	2.43
JLS68102-G2WRAP-4FT	48.22	5.78	2.43

ORDERING GUIDE							JLS68102-G2WRAP-M2-4-40K-10-S
MODEL	WATTAGE	LENGTH	CCT	DRIVERS	CONTROLS	STYLE	
JLS68102-G2WRAP	Vari-Watt Driver (VW) M1 = (15W/20W/25W) * M2 = (20W/30W/40W) ** M3 = (30W/40W/50W) ** * M1 only 2ft available ** M2 M3 only 4ft available	2 = 2ft. 4 = 4ft.	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K MCCT = 3500K,4000K,5000K	10 = 0-10V	OC = Occupancy Sensor On/OFF OCBL = Occupancy Sensor Bi-level Dimming EM = Emergency Back Up	S = Standard	



Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification. Contact Jaykal for additional product approval.

Specifications are typical values and may change without notification

efficiency. illuminated.


G2 WRAP FIXTURES




JAYKAL

MOUNTING AND INSTALLATION


- ◆ Surface mounting is standard
- ◆ Optional V-Hook and Chain Hanger
- ◆ Optional Cable Kit Available
- ◆ Motion Sensor Options Available
- ◆ Cord or FMC option available

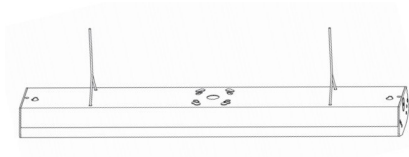


V-hook and Chain Mounting

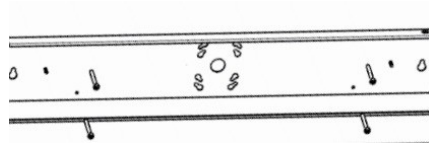


Surface Mount



J-Box Mounting Compatible



Options: 45° angled bracket



WALL Mount Option

Specifications are typical values and may change without notification

efficiency. illuminated.