T8 TYPE B LED TUBE - 0-10V Dimmable



	JAYKAL
PROJECT NAME:	JAYKAL LED SOLUTIONS, INC. www.jaykal.net
PROJECT NOTES:	21499 Baltimore Ave.
	Georgetown, DE 19947
	(P) 302-295-0015
	(F) 302-295-0016

KEY FEATURES

- ♦ Integrated 0-10V Dimming Driver
- Optional Housing : Glass/Nano Polycarbonate
- ♦ Simple Installation & Replacement
- Shatterproof Design
- ♦ Warranty : 5 years













T8 TYPE B LED TUBE - 0-10V Dimmable

				JAYKAL					
SPECIFICATIONS TABLE									
INPUT VOLTAGE	120-277VAC 50/60hz								
LENGTH	2FT	3FT	4	4FT					
WATTAGE	8W	12W	10.5W	12W					
EFFICACY	132m/W	125lm/W	157lm/W	150lm/W					
LUMENS	1,050lm	1,500lm	1,650lm	1,800lm					
POWER FACTOR	>0.95								
THD	<20%								
VIEWING ANGLE	200°								
WIRING SCHEME	Single Ended or Double Ended								
CRI	Ra>80								
L70 Hours	>50,000								
сст	3000K/3500K/4000K/5000K								
WORKING TEMP.	-20°C - +45°C								
ENVIRONMENT	Dry/Damp								
HOUSING	Glass/Nano								

ORDERI	PRDERING GUIDE JLS68101-4-40K-F-10.5-SD-GLASS-S-10						-S-10				
MODEL	- LENGTH	сст		LENS		WATTS	ТҮРЕ	HOUSING	DRIVER		DIMMING
JLS68101	2 = 2 Foot 3 = 3 Foot 4 = 4 Foot	830K = 3000K 835K = 3500K 840K = 4000K 850K = 5000K		F = Frosted		8 = 8W* 12 = 12W** 10.5 = 10.5W*** 12 = 12W*** * 2 Foot Lamps ** 3 Foot Lamps *** 4 Foot Only	SD = Single or Double Ended	GLASS = Glass NANO = Nano	S = Standard FF = Flicker-Free		10 = 0-10V



T8 TYPE B LED TUBE - 0-10V Dimmable


JAYKAI

Product	Length Pin to Pin (in.)	Length Base to Base (in.)	Diameter (in.)
4 Foot	47.71	47.165	1.125
3 Foot	35.55	23.11	1.125
2 Foot	23.77	23.14	1.125

WIRING DIAGRAMS



Single ended 0-10V dimming

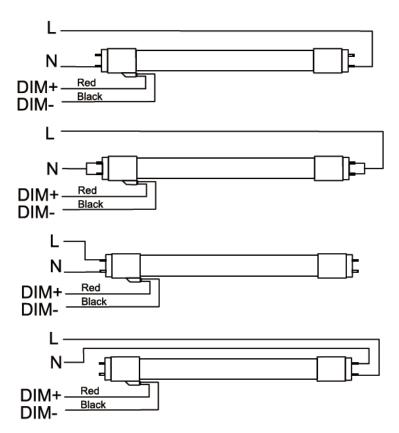

Single&Double ended 0-10V dimming