# **VAPOR TIGHT FIXTURE**



	JAYKAL
PROJECT NAME:	JAYKAL LED SOLUTIONS, INC. www.jaykal.net
PROJECT NOTES:	21499 Baltimore Ave.
	Georgetown, DE 19947
	(P) 302-295-0015

## **FEATURES**

- ♦ Wattages Available 22W, 40W, 60W
- ♦ Voltage Input 120-277VAC 50/60Hz
- ◆ CCT: 3000K/4000K/5000K
- ♦ IP65 Rating, IK08 Rating
- Polycarbonate Construction with Integrated Powder Coated Lighting Tray
- Stainless Steel Clips















# **VAPOR TIGHT FIXTURE**



			JAYKAL						
SPECIFICATIONS TABLE									
MODEL	JLS68103-VT SERIES								
INPUT VOLTAGE	100-277VAC 50/60HZ								
WATTAGE	22W	40W	60W						
EFFICACY	150lm/W	150lm/W	150lm/W						
LUMENS	3,300lm	6,000lm	9,000lm						
POWER FACTOR	>0.90								
CRI	>80								
BEAM ANGLE	120°								
L70 HOURS	>100,000								
ССТ	3000к/4000к/5000к								
WORKING TEMP.	-20°C - 50°C								
IP RATING	IP65 Wet Locations								
HOUSING	Polycarbonate Surface Mount / Chain / J-Box Mounting								
LENS	Frosted or Clear Polycarbonate								
DIMENSIONS (in.)	47.24"L x 3.54"W x 3.15"H (N type) / 47.24"L x 4.72"W x 3.46"H (M type)								

ORDERIN	ORDERING GUIDE EXAMPLE: JLS68103-VT-N-40-277-40K-F-10									
MODEL		WIDTH	WATTAGE		VOLTAGE		сст	LENS	DIMMING	OPTIONS
JLS68103-VT		<b>N</b> = 90mm <b>M</b> = 120mm	22 = 22 Watts * 40 = 40 Watts 60 = 60 Watts ** * For N only ** For M only		<b>277</b> = 120-277VAC		<b>30K</b> = 3000K <b>40K</b> = 4000K <b>50K</b> = 5000K	<b>C</b> = Clear	<b>N</b> = Non-Dimming <b>10</b> = 0-10V	Blank = No options  MS = Motion Sensor  EM = Battery Backup




Not all product variations listed on this page are DLC qualified. Visit <a href="www.designlights.org/search">www.designlights.org/search</a> to confirm qualification. Contact Jaykal for additional product approval.

# **VAPOR TIGHT FIXTURE**



**JAYKAL** 

## **DIMENSIONS**

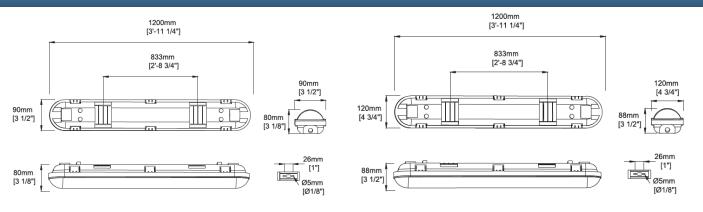

N type (90mm Width)

M type ( 120mm Width )



Not all product variations listed on this page are DLC qualified. Visit <a href="www.designlights.org/search">www.designlights.org/search</a> to confirm qualification. Contact Jaykal for additional product approval.